

DT 0608407  
JAN 1935

Zu der Patentschrift

608,407

Kl. 79b Gr. 28

Jan 23, 1935.

Dt-01-1935

1935

Fig. 1.


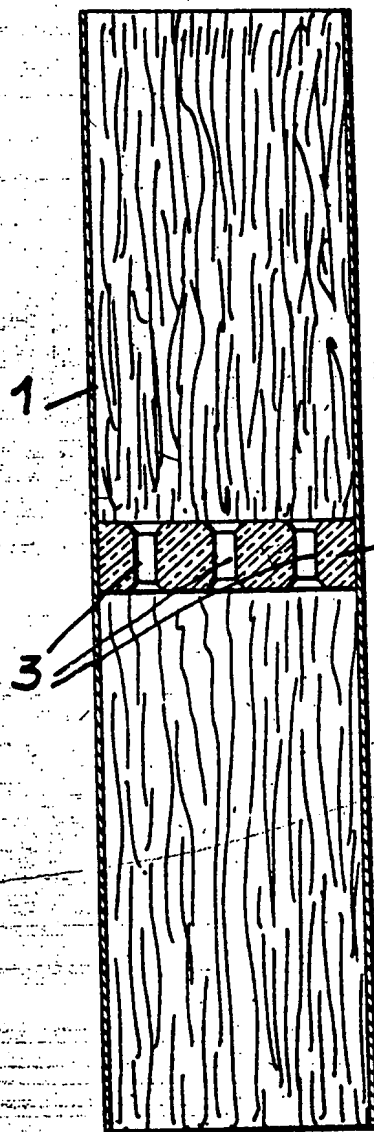


Fig. 2.

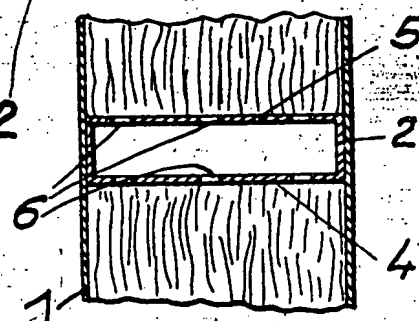

Cigarette may be made with  
one or several inserts to  
provide a number of separate  
sections.

may be provided  
with passages 3

June 5, 1942

CFS:MP

# Translation of German Pat. No. 608,407, Cigarette with Insert

It is a known fact that the smoker is often satisfied if he can smoke only a part of the cigarette.

Also it is known that a cigarette once lighted will loose its taste after being put out. Also, it must be remembered that burning cigarettes will continue to burn to the end after they are laid aside.

Now if it is desired to prevent this further burning, it will be necessary to extinguish the cigarette completely, whereby, in most cases, it is destroyed; at least it will loose its form and will look crummy.

It has been proposed to prevent the further burning of the cigarette by the provision of a baffle in one or more different places which will prevent the burning behind a definite point.

These means prevent the further burning only when the cigarette is laid down and is not smoked any longer, but also in this case the tobacco will glow on the inside until the accumulated ash will choke the admittance of air and therefore extinguishes the glow.

By this, the quality of the tobacco in the remaining cigarette will be unfavorably influenced and when it is relighted the metal band must be removed with the first puff of the tobacco which is left.

Es ist eine Raucher oft nur einen Teil. Ebenso ist es 5 gezündete Zigarette maligem Anzünd verloren hat. nende Zigarette beabsichtigt b 10 Will man das muß man die drücken, wobei zerstört wird, Form verliert. 15 Es ist auch das Zigaretten oder durch A einzelnen Stelle um damit das rauben bestimmte Dies Mittel v brennen nur da aus der Hand raucht. Aber a 25 der Tabak nach den unverbrenn gehaltene Asche Luft abschließt zum Erlöschen 30 Qualität des Tab Zigarettenrest un Neuanzünden m der Asche auch entfernt wer

-2-

It is also known that the cigarette near the mouthpiece has a plug of asbestos inserted which has the purpose of establishing the complete burning and also peeling off of the cigarette and to prevent further burning of the cigarette by combustion.

According to the present invention, in order to obviate the objections stated above and to cause the cigarette to extinguish itself so that it can be smoked again later, the cigarette is divided by uncombustible inserts. After this is burned off, the cigarette can be again lighted and smoked without having lost its taste.

According to the drawings,

Figure 1 shows a cigarette with its insert in section.

Figure 2 is a modification of the insert.

The cigarette encased the paper 1 is provided with an insert 2 made of noncombustible material which may be either porous or provided with passages 3.

The insert, according to fig. 2, can be built in the form of a box and has in its bottom 4 and also in the top 5 a series of openings 6 for the smoke gases. As already stated, several inserts may be provided in order to permit the cigarette to be relighted several times.

The use of the cigarette is effected in such a way that after each extinguishing of the cigarette part at the insert the latter will be removed, whereupon the cigarette can again be relighted.